

4000mm x 10mm x 150mm	4000mm x 8mm x 225mm
3600mm x 10mm x 150mm	3600mm x 8mm x 225mm
3000mm x 10mm x 150mm	3000mm x 8mm x 225mm

Tailor-made lengths available on request.

nøwatech SUPREME STRENGTH

			Contraction of the second s
MA	DE FROM	RECYCLED	MATERIALS
		10 million (10 mil	and the second se



Nowa Tech (Pty)Ltd Contact us on T +27 876 100 866 E connect@nowatech.green

RESILIENT	100%
PROVEN	100%
TRUSTED	100%

Who is Nowa Tech?

Nowa Tech (Pty) Ltd is an established South African wood polymer composite (WPC) manufacturer, with exceptional experience in the use of polyvinyl chloride (PVC) technology.

Our passion for the planet and its people fuelled our rigorous research, development and field testing, to launch the only locally manufactured PVC / WPC product range for building applications.

With two decades of demonstrated quality in installations and experience in PVC WPC we can confidently deliver on our ten-year guarantee. We believe in continuous improvement through innovation, and we consistently invest in research and development to provide enhanced products to our customers.

Our products deliver solutions that are durable, environmentally friendly, and most of all, optimise our customers' project costs, reducing wastage and saving time. From building and home improvement products through to the public and transport sectors, we deliver smartly.

Nowa Tech provides long-lasting products to our customers while fostering an unwavering focus on restoring a sustainable environment for all of us and future generations.

NøwaFascia Board 2.0

APPLICATIONS COMMERCIAL RESIDENTIAL INDUSTRIAL


MOISTURE RESISTANT

42.69

FIRE RETARDANT

NowaFascia Result

UV STABLE

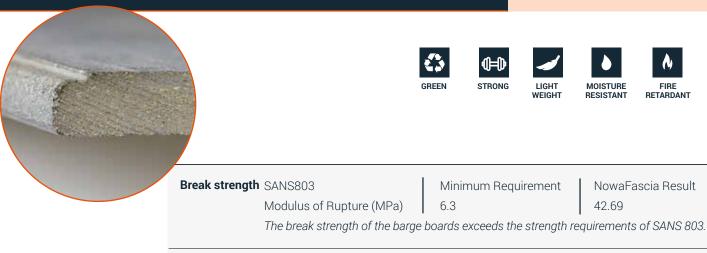



Fire Retardancy

PVC is a self-extinguishing polymer, and therefore the product will not propagate fire.

UV Stability

The product is UV stabilised. PVC is a well-known polymer used in the building industry for exterior applications. The product is meant to be painted.

LIGHT WEIGHT

Expansion





NowaFascia Result 0.3%

Linear expansion for temperature and water has been tested and conforms to the expansion requirements of SANS 803.



MADE FROM RECYCLED MATERIALS

۶ ــ	í	225mm	1
8mm	(150mm)
	10mm		

NøwaFascia Board 2.0




4000mm x 10mm x 150mm	4000mm x 8mm x 225mm
3600mm x 10mm x 150mm	3600mm x 8mm x 225mm
3000mm x 10mm x 150mm	3000mm x 8mm x 225mm

Tailor-made lengths available on request.

Follow the below NowaFascia Board installation instructions to ensure correct installation.

If you are unclear on installation instructions, please contact support at Nowa Tech on +27 876 100 866. Guarantees are subject to installations conforming to Nowa Tech installation guidelines.

- 1. Ensure that rafter ends / purlins or battens are aligned and trimmed before installation.
- 2. Incorrect alignment will affect the final appearance of the NowaFascia board.
- 3. Pilot holes are required to allow for expansion and contraction. Pre-drill the pilot holes 2mm larger than intended fixation nail, screw or bolt.
- 4. NowaFascia is compatible with universal fixing and finishing accessories.
- 5. Use a chalk line to measure and cut rafters to size ensuring a level surface for the NowaFascia boards to attach to.
- 6. Align and fix both ends of the NowaFascia board ensuring the board is level.
- 7. Middle points can now be fixed at regular intervals, ensuring an even straight finish.
- 8. If required, joins should be made in between fixation points.
- 9. Exterior side is brushed and ready for two coats of good quality roof paint no primer required.
- 10. Interior side should be sanded using P60 grit removing the shiny wax layer completely prior to painting.
- 11. NowaFascia boards should be stored undercover as far as possible. When stored in direct sunlight, loosen any pallet strapping to allow natural expansion and contraction without distortion.

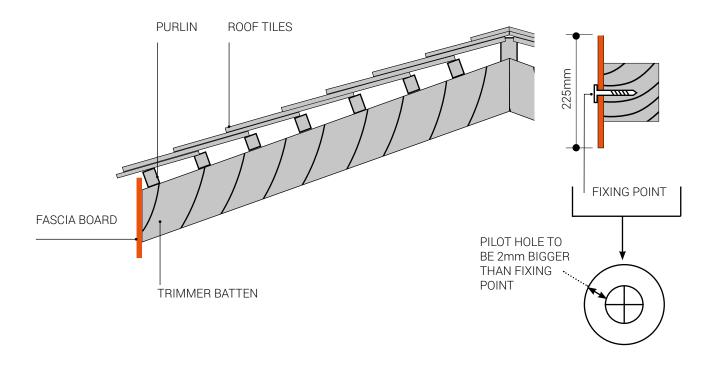




NøwaFascia Board 2.0

APPLICATIONS
COMMERCIAL
RESIDENTIAL
INDUSTRIAL

Superior strength and quality wrapped up in one premium product. NowaFascia is incredibly tough, UV resistant, light-weight, green and recyclable.



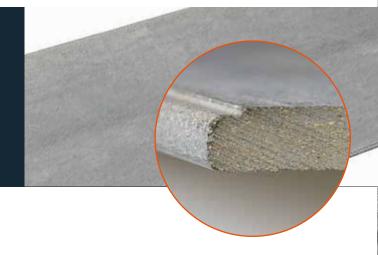



CERTIFICATE 2017/559





Nowa Tech (Pty)Ltd Contact us on T +27 876 100 866 E connect@nowatech.green

> Fourways Office Park Block 3, 1st Floor cnr Roos Street & Fourways Boulevard Fourways, 2055

Why choose NowaFascia board?

- Superior strength.
- Significant reduction in breakages.
- Superior weathering and water resistance.
- · Environmentally friendly PVC (Polyvinyl chloride) wood composite.
- Suitable for commercial, residential and industrial applications.
- Compatible with universal Fascia joiners for size 225 x 10mm.
- The exterior is brushed and ready for two coats of good quality roof paint, no primer required.
- Conforms to, and exceed the strength requirements of SANS 803 under stringent in-house testing conditions.
- Standard lengths of 4000mm, 3600mm and 3000mm available in both 225 x 8mm and 150 x 10mm profiles.
- Boards are light, weighing only 2,85kg/m.
- Boards are locally manufactured allowing for custom lengths on volume orders resulting in material and labour cost saving as joiners are not required – please contact our office with your requirements.

Why choose PVC?

PVC is one of the hardest thermoform plastics and is widely used in applications where increased rigidity, strength and endurance are required. It is inherently fire retardant and is highly recyclable. Of all the plastics used in WPC applications, PVC is the most durable, enduring and weather resistant.

*Based on in-house calibrated equipment